



ELECTRONICS, INC.  
 44 FARRAND STREET  
 BLOOMFIELD, NJ 07003  
 (973) 748-5089  
<http://www.nteinc.com>

## NTE3303 Insulated Gate Bipolar Transistor N-Channel Enhancement Mode, High Speed Switch TO220 Full Pack

**Features:**

- High Input Impedance
- High Speed
- Low Saturation Voltage
- Enhancement Mode

**Applications:**



- High Power Switching
- Motor Control

**Absolute Maximum Ratings:** ( $T_A = +25^\circ\text{C}$  unless otherwise specified)

Collector-Emitter Voltage, $V_{CE}$ .....	600V
Gate-Emitter Voltage, $V_{GES}$ .....	$\pm 20\text{V}$
Collector Current, $I_C$	
DC .....	15A
Pulse (1ms) .....	30A
Collector Power Dissipation ( $T_C = +25^\circ\text{C}$ ), $P_C$ .....	35W
Operating Junction Temperature, $T_J$ .....	$+150^\circ\text{C}$
Storage Temperature Range, $T_{stg}$ .....	$-55^\circ$ to $+150^\circ\text{C}$

**Electrical Characteristics:** ( $T_A = +25^\circ\text{C}$  unless otherwise specified)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Gate Leakage Current	$I_{GES}$	$V_{GE} = \pm 20\text{V}, V_{CE} = 0$	-	-	$\pm 500$	nA
Collector Cutoff Current	$I_{CES}$	$V_{CE} = 600\text{V}, V_{GE} = 0$	-	-	1.0	mA
Collector-Emitter Breakdown Voltage	$V_{(BR)CES}$	$I_C = 2\text{mA}, V_{GE} = 0$	600	-	-	V
Gate-Emitter Cutoff Voltage	$V_{GE(off)}$	$I_C = 15\text{mA}, V_{CE} = 5\text{V}$	3.0	-	6.0	V
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C = 15\text{A}, V_{GE} = 15\text{V}$	-	3.0	4.0	V
Input Capacitance	$C_{ies}$	$V_{CE} = 10\text{V}, V_{GE} = 0, f = 1\text{MHz}$	-	1100	-	pF
Rise Time	$t_r$	$V_{CC} = 300\text{V}$	-	0.3	0.6	$\mu\text{s}$
Turn-On Time	$t_{on}$		-	0.4	0.8	$\mu\text{s}$
Fall Time	$t_f$		-	0.15	0.35	$\mu\text{s}$
Turn-Off Time	$t_{off}$		-	0.5	1.0	$\mu\text{s}$

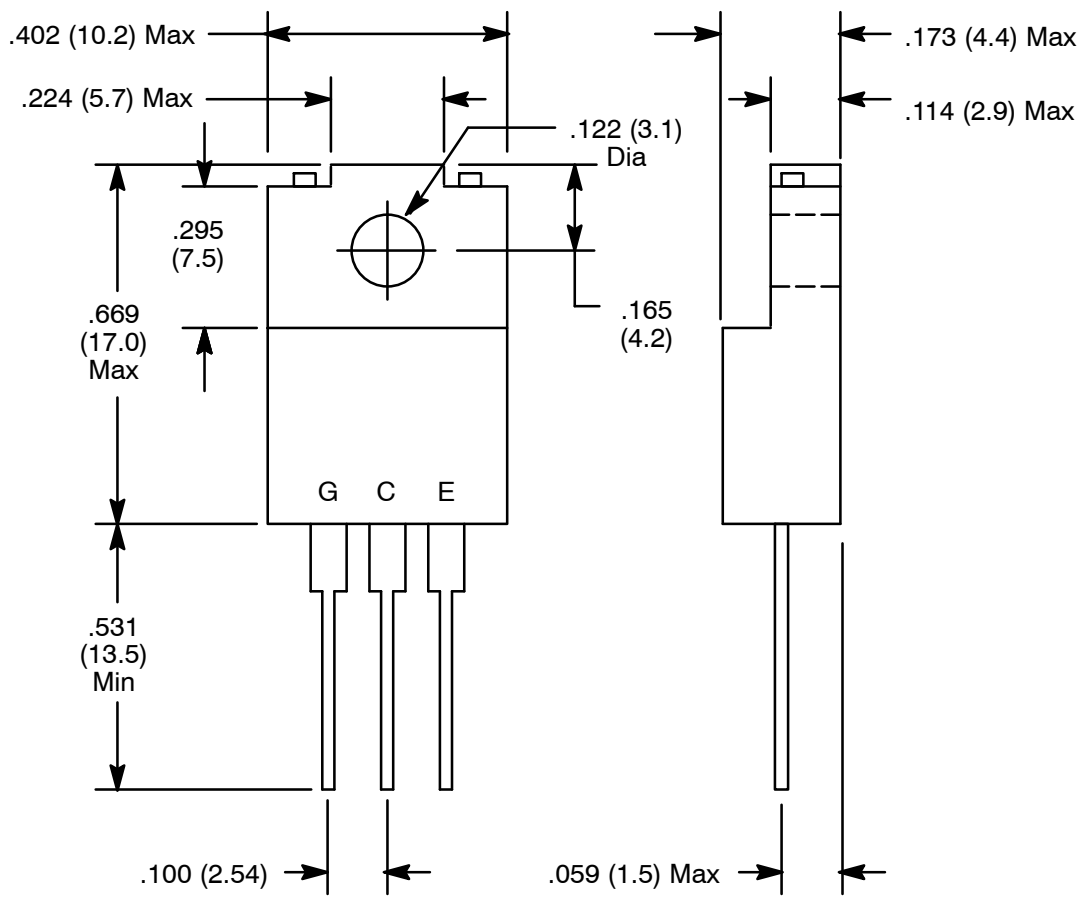

**NOTE:** Tab is isolated