


Illuminated On/Off Bat Handle and Duckbill Toggle




Features

- Bat Handle and Duckbill Types
- .250" Quick-Connect Terminals

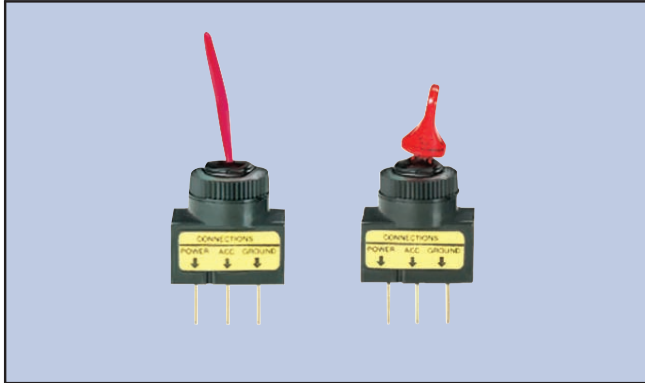

S31

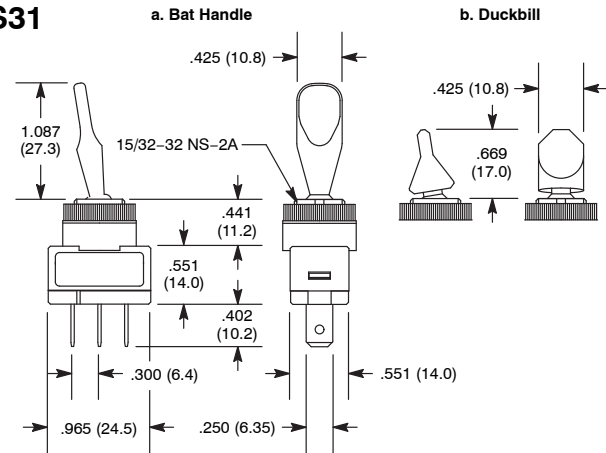

NTE Type No.	Circuitry	Action			Actuator		Diag No.
					Material	Color	
54-567	SPST	ON	NONE	OFF	PC (S-2000R Mitsubishe)	Red	S31a
54-568	SPST	ON	NONE	OFF		Green	S31a
54-569	SPST	ON	NONE	OFF		Amber	S31a
54-570	SPST	ON	NONE	OFF		Blue	S31a
54-572	SPST	ON	NONE	OFF		Red	S31b
54-573	SPST	ON	NONE	OFF		Amber	S31b
54-574	SPST	ON	NONE	OFF		Blue	S31b
54-575	SPST	ON	NONE	OFF		Green	S31b

Specifications

- Current Rating:** 20A 12VDC
- Lens Color:** See Table
- Lamp Voltage:** 12V Neon
- Insulation Resistance:** 100 Megohms (min.) at 500VDC
- Dielectric Strength:** 1000V RMS (min.)
- Temperature Rating:** -4°F to +180°F (-20°C to +85°C)
- Electrical Life:** 25,000 cycles
- Mechanical Life:** 100,000 cycles
- Terminal Type:** .250" Tab Q.C.
- Mounting Hole:** .500 (12.7)